


Recessed downlight (Light Source)

MODEL NUMBER	L030500RC
Voltage (V):	AC220-240V
Product Wattage (W):	7
Cut out(mm):	70
Tilting Angle (°):	30
IP rating:	IP20
Colour:	White / Black
Materials:	Aluminium
Protection Class:	Class II
Diameter (mm):	87
Height (mm):	40




LIGHT SOURCE MODEL	LR211053
Voltage (V):	AC220-240V
Frequency:	50-60 Hz
Colour Temperature (K):	2800, 4000
Product Wattage (W):	5.3
Power Factor (λ):	0.7
Beam Angle (°):	24, 35
IP rating:	IP20
Lumen Maintenance at the End of Lamp Life(%):	70
Switching Cycles (times)	>1000000
Rated Life(hrs):	25000
Operating Temperature:	-30°C to +45°C

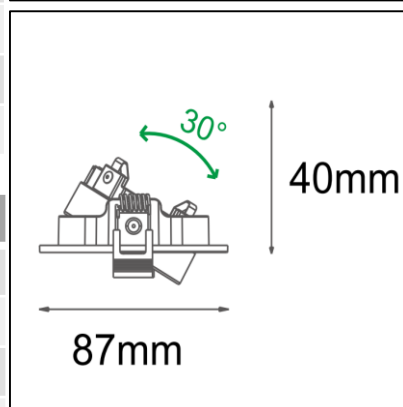

Recessed downlight (Light Source)

MODEL NUMBER	VL-R-0075
Voltage (V):	AC220-240V
Product Wattage (W):	7
Tilting Angle (°):	30
IP rating:	IP20
Colour:	White / Black
Materials:	Aluminium
Protection Class:	Class III
Cut out(mm):	98
Diameter (mm):	115
Height (mm):	130

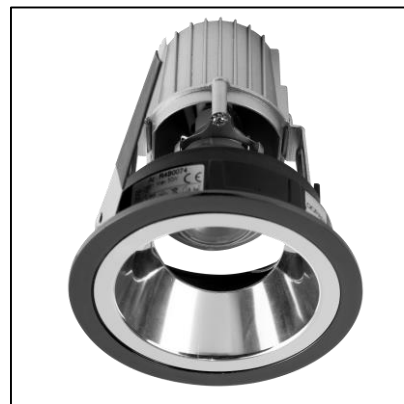

LIGHT SOURCE MODEL	TER8007
Voltage (V):	DC12V
Frequency:	50-60 Hz
Colour Temperature (K):	2700, 4000
Product Wattage (W):	7
Power Factor (λ):	0.9
Beam Angle (°):	24
IP rating:	IP20
Lumen Maintenance at the End of Lamp Life(%):	70
Switching Cycles (times)	>1000000
Rated Life(hrs):	25000
Operating Temperature:	-30°C to +45°C




Recessed downlight (Light Source)

MODEL NUMBER	VL-R-0037
Voltage (V):	AC220-240V
Product Wattage (W):	7
Tilting Angle (°):	30
IP rating:	IP20
Colour:	White / Black
Materials:	Aluminium
Protection Class:	Class III
Cut out(mm):	70
Diameter (mm):	95
Height (mm):	108



LIGHT SOURCE MODEL	TER8007
Voltage (V):	DC12V
Frequency:	50-60 Hz
Colour Temperature (K):	2700, 4000
Product Wattage (W):	7
Power Factor (λ):	0.9
Beam Angle (°):	24
IP rating:	IP20
Lumen Maintenance at the End of Lamp Life(%):	70
Switching Cycles (times)	>1000000
Rated Life(hrs):	25000
Operating Temperature:	-30°C to +45°C





Recessed downlight (Light Source)

MODEL NUMBER	VL-R-0181
Voltage (V):	AC220-240V
Product Wattage (W):	7
Tilting Angle (°):	30
IP rating:	IP20
Colour:	White / Black
Materials:	Aluminium
Protection Class:	Class III
Cut out(mm):	83
Diameter (mm):	90
Height (mm):	135



LIGHT SOURCE MODEL	TER8007
Voltage (V):	DC12V
Frequency:	50-60 Hz
Colour Temperature (K):	2700, 4000
Product Wattage (W):	7
Power Factor (λ):	0.9
Beam Angle (°):	24
IP rating:	IP20
Lumen Maintenance at the End of Lamp Life(%):	70
Switching Cycles (times)	>1000000
Rated Life(hrs):	25000
Operating Temperature:	-30°C to +45°C



Recessed downlight (Light Source)

MODEL NUMBER	VL-R-0277
Voltage (V):	AC220-240V
Product Wattage (W):	7
Tilting Angle (°):	30
IP rating:	IP20
Colour:	White / Black
Materials:	Aluminium
Protection Class:	Class III
Cut out(mm):	68
Diameter (mm):	74
Height (mm):	1



LIGHT SOURCE MODEL	TER8007
Voltage (V):	DC12V
Frequency:	50-60 Hz
Colour Temperature (K):	2700, 4000
Product Wattage (W):	7
Power Factor (λ):	0.9
Beam Angle (°):	24
IP rating:	IP20
Lumen Maintenance at the End of Lamp Life(%):	70
Switching Cycles (times)	>1000000
Rated Life(hrs):	25000
Operating Temperature:	-30°C to +45°C

